


Performance criteria

Closing force	size according to EN standards	1/2
Door width	≤ 800 mm	■
Dimensions	Length in mm	209
	Depth in mm	38
	Height in mm	56
Slide rail		GS B
Mounting plate		-
Hinge / hinge-opposite side		■
DIN L / R		■
Latching speed (adjustable at the side)		■
Closing speed (adjustable at the side)		■

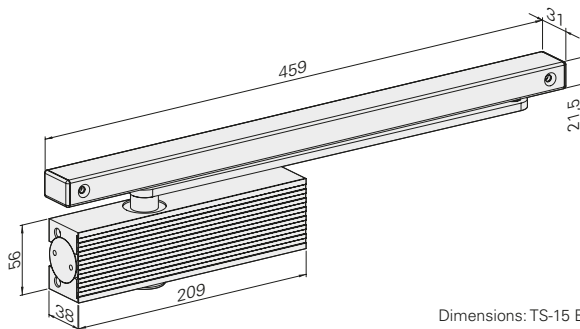

Dimensions: TS-15 B

- Yes
- No
- Optional



Body + ECOslide:
Silver RAL 9006



Body + ECOslide:
White RAL 9016



Body + ECOslide:
Black RAL 9005

Slide rails and lever arms are always delivered in the same colour as the body.

ECO **Newton TS-15** with slide rail B:

Order information

ECO **Newton TS-15 B** ■ Slide rail closer

Product information

- Closing force size 1 / 2 according to EN standard (for door widths up to 800 mm)
- Latching speed and closing speed continuously adjustable at the side
- Same model for DIN L/R
- Depth only 38 mm
- Max. door opening angle: 180°

New overall packaging:

Complete set incl. door closer body, slide rail and special lever (with 8-sided nut).

Article numbers


ECO **TS-15 B**



Door closer with slide rail B	Colour	Art. no.
TS-15 B (1/2)	Silver RAL 9006	5030028129
TS-15 B (1/2)	White RAL 9016	on request
TS-15 B (1/2)	Black RAL 9005	5030052313

Hinge side

Installation with slide rail B, figure DIN L door, DIN R mirrored

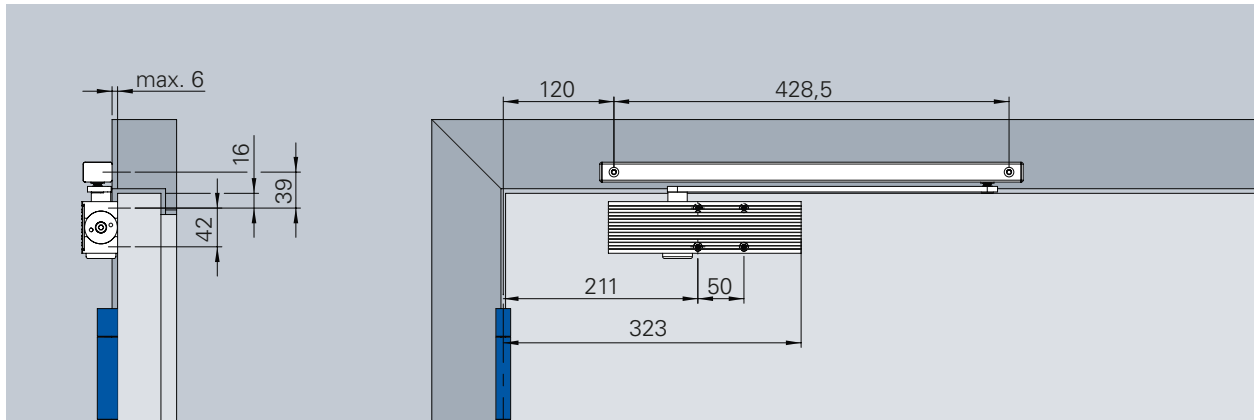

with slide rail B

■ Closing speed

Continuously adjustable closing speed from 180°–0°.

■ Latching speed


Increases the closing speed and thus the closing force for safe closing of the door, e.g. to overcome door seals, latches and air pressure. Continuously adjustable, active from 10° – 0°.

Closing force diagram ECO **Newton TS-15 B**, hinge side



Opposite hinge side

Installation with slide rail B, figure DIN R door, DIN L mirrored

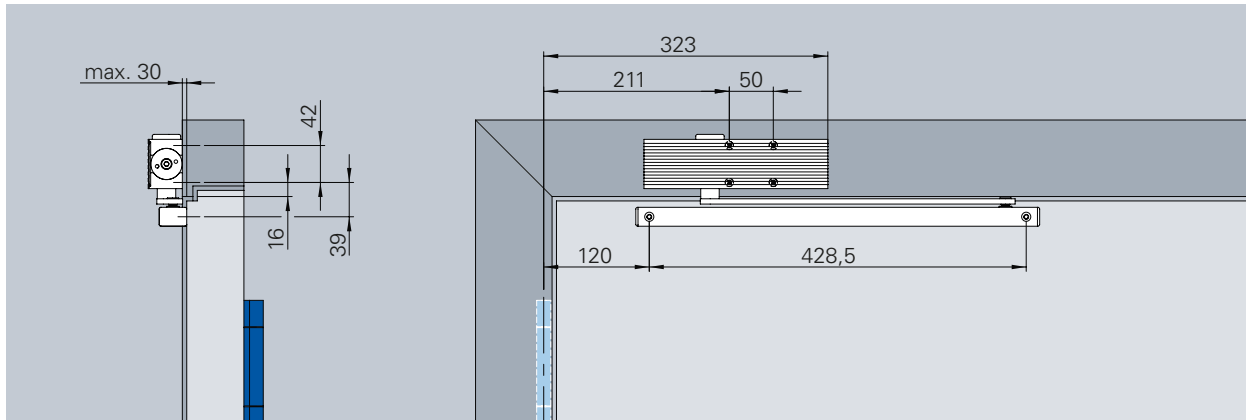

Frame installation with slide rail B, opposite hinge side

Closing speed
Continuously adjustable closing speed from 140°* – 0°.

Latching speed
Increases the closing speed and thus the closing force for safe closing of the door, e.g. to overcome door seals, latches and air pressure. Continuously adjustable, active from 10° – 0°.

Closing force diagram ECO **Newton TS-15 B**, opposite hinge side



*Varies according to door thickness and hinge type.

Opening range must be limited by a door stop!

ECO Schulte GmbH & Co. KG

Iserlohner Landstraße 89

D-58706 Menden

Telephone +49 2373 9276 - 0

Telefax +49 2373 9276 - 40

info@eco-schulte.de

www.eco-schulte.de

Our compendium represents a compilation of all products from our range of services. These are subject to different delivery classes. Special variants included are often manufactured to customer specifications and sometimes require longer delivery times and minimum purchase quantities. Further advise can be given by your contact person.

■ SYSTEM TECHNOLOGY FOR THE DOOR

