

D-110/D-110 security handle RC 4 – panic





D-110 burglar-resistant long plate security set ES 3 and D-110 handle on long plate with panic knob/lever function

Specially designed to withstand break-ins attempted by forcibly removing the fitting according to DIN EN 1627-1630. Custom solution, patent pending. Burglary protection ES 3, according to DIN 18257. Suitable for resistance class RC 4.

Panic function according to EN 179. Suitable for panic locks. Panic function E (knob) and D, B, C (lever handle).

Maintenance-free friction bearing
Can be used for DIN L/R.
User category class 4.

Outside: Height 15 mm
Short fixing bolts available on request.

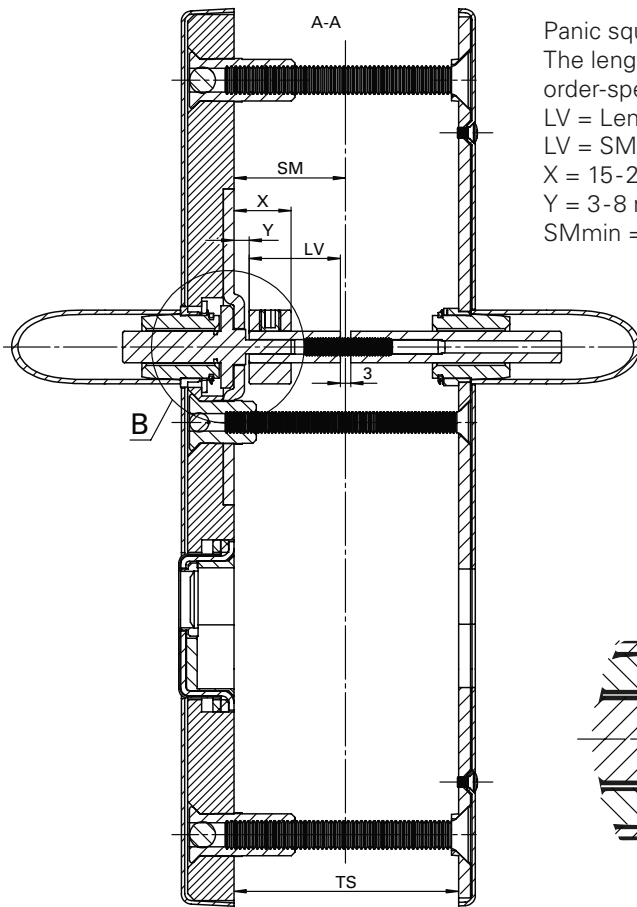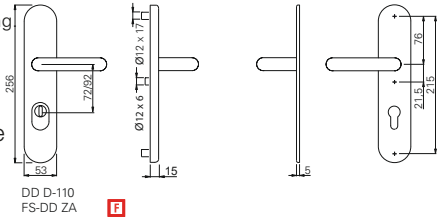

Panic square spindle for RC4:

The lengths of the panic spindles must be determined on an order-specific basis!

LV = Length of RC4 square spindle:


LV = SM - Y - 1.5 mm; (LVmin = 23 mm) SM = middle of lock

X = 15 - 20 mm

Y = 3 - 8 mm

SMmin = LVmin + Ymin + 1.5 mm = 28 mm

Specially designed to withstand break-ins attempted by forcibly removing the fitting according to DIN EN 1627-1630. Custom solution, patent pending.

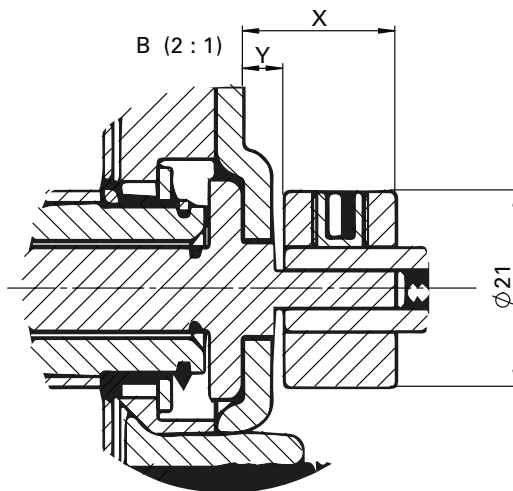

ECO Schulte GmbH & Co. KG

Iserlohner Landstraße 89

D-58706 Menden

Telephone +49 2373 9276 - 0

Telefax +49 2373 9276 - 40

info@eco-schulte.de

www.eco-schulte.de

Our compendium represents a compilation of all products from our range of services. These are subject to different delivery classes. Special variants included are often manufactured to customer specifications and sometimes require longer delivery times and minimum purchase quantities. Further advise can be given by your contact person.

■ SYSTEM TECHNOLOGY FOR THE DOOR

